


# Hinged Door

COMMERCIAL SERIES - 125mm FRAME



## FRAME ONLY DOOR - WITH SILL SUPPORTING INFORMATION

- Panel deductions of Open-In and Open-Out doors are identical.
- Panel width deduction of 112mm requires the hinges to be rebated into the panel by the 3mm leaf thickness.
- Panel height deduction of 115mm is based on keeping the mandatory 5mm gap at the head, and a nominal 10mm gap at the sill.
- This 10mm nominal sill gap must be weather sealed via a suitable sill seal which the builder must source and install.
- \*If the installer wishes to increase or decrease the gap from the nominal 10mm gap at the sill, please advise your Rylock Sales Consultant.
- Compatible with a 40mm - 45mm thick panel.



PRODUCT INFORMATION



INSTALLATION RESOURCES

Height (mm)	
Panel	Frame
2040	2155
2340	2455
Width (mm)	
Panel	Frame
620	732
720	832
770	882
820	932
870	982
920	1032
1020	1132
1200	1312


Featuring various Raven® seals:  
Left to right: RP70Si, \*\*RP129Si and \*\*RP4T

\*\*Raven® seals RP129Si and RP4T require a gap larger than the default 10mm, refer to [www.raven.com.au](http://www.raven.com.au) for more information.

V24.2

# Hinged Door

COMMERCIAL SERIES - 125mm FRAME

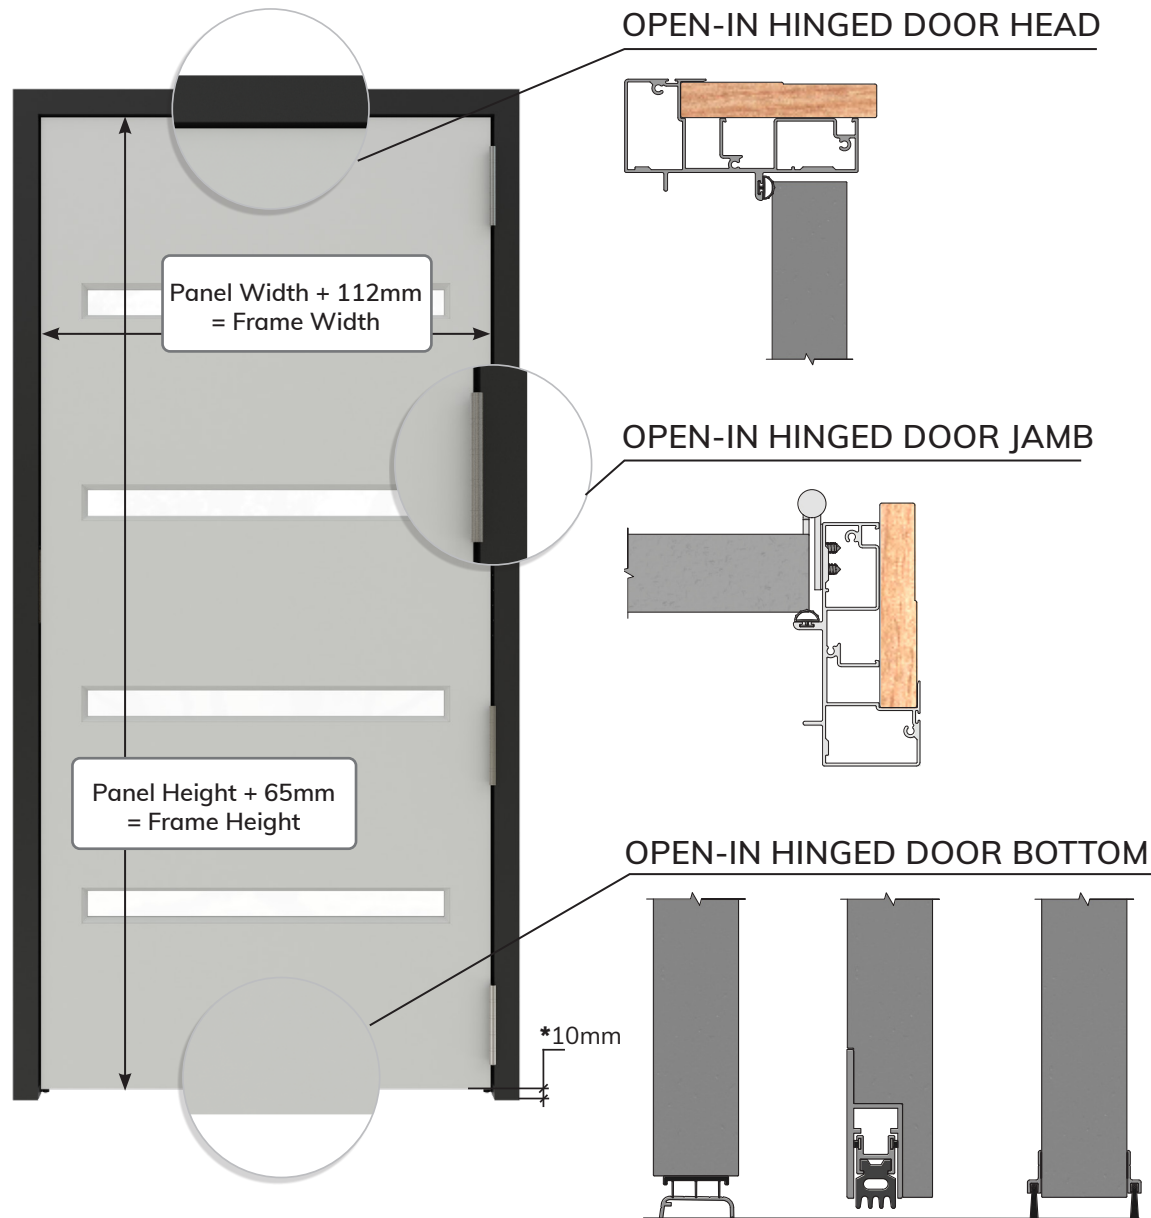

## FRAME ONLY DOOR - WITHOUT SILL SUPPORTING INFORMATION

- Panel deductions of Open-In and Open-Out doors are identical.
- Panel width deduction of 112mm requires the hinges to be rebated into the panel by the 3mm leaf thickness.
- Panel height deduction of 65mm is based on keeping the mandatory 5mm gap at the head, and a nominal 10mm gap at the sill (measured to the cut end of the jamb extrusion).
- This 10mm nominal sill gap must be weather sealed via a suitable sill seal which the builder must source and install.
- \*The product should be ordered and built-in in such a way so as to maintain a 10mm nominal sill gap between the bottom of the panel and the finished floor level. Adjustments to the height deduction should be made in conjunction with your Rylock Sales Consultant when a different gap is desired, or a finished floor level will encroach on the default 10mm gap.
- Compatible with a 40mm - 45mm thick panel.



PRODUCT INFORMATION



INSTALLATION RESOURCES

Door panel sill meeting with finished floor level. Featuring various Raven® seals: Left to right: RP86\*\*, RP38 and RP74F

\*\*Raven® seal RP86 requires a gap larger than the default 10mm, refer to [www.raven.com.au](http://www.raven.com.au) for more information.

Height (mm)	
Panel	Frame
2040	2105
2340	2405
Width (mm)	
Panel	Frame
620	732
720	832
770	882
820	932
870	982
920	1032
1020	1132
1200	1312

V24.2