

CASEMENT WINDOW

COMMERCIAL SERIES - 125mm FRAME



Casement windows promote efficient ventilation by harnessing cross breezes. Sashes can be adjusted to direct cool air through the building. Commercial Series casement windows allow for the largest sash sizes, which is often required within many contemporary projects




Heavy duty stainless-steel stays



Mechanical bar operators feature key locking & precise sash control. Secondary latches (below) ensure that the sash is tightly closed against the double seals


Commercial Series windows are based around square, geometric profiles for a clean aesthetic. Hardware & fly screens are carefully integrated into the windows to ensure an elegant product both inside & out

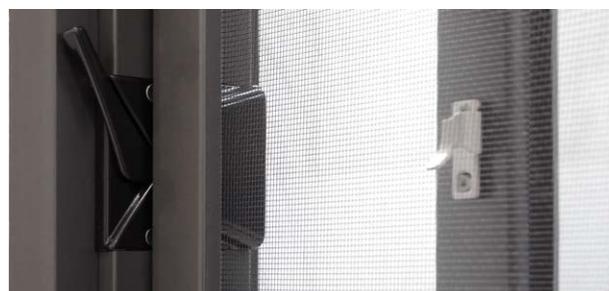

CASEMENT WINDOW



COMMERCIAL SERIES - 125mm FRAME

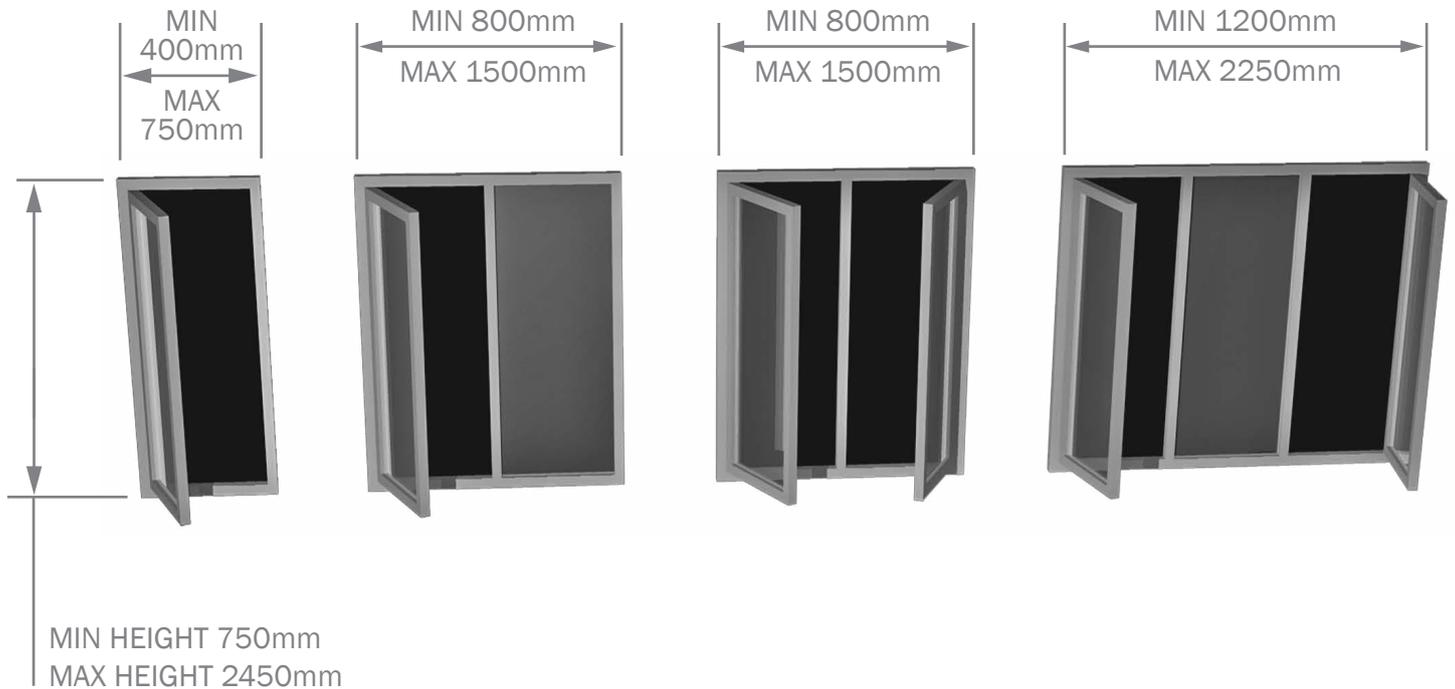

ALL SIZES ARE TYPICAL RATHER THAN DEFINITIVE. HEIGHT TO WIDTH RESTRICTIONS CAN APPLY,
NOTE: TYPICALLY APPROACHING MINIMUM & MAXIMUM SIZES.
FOR SIZES OUTSIDE OF THESE (incl. raked windows) PLEASE DISCUSS WITH YOUR SALES CONSULTANT.

Sizing

Window style & opening detail should be considered as viewed externally
Sizes indicated are the overall window size. Reveal is inline with outer frame dimension.
For Stud openings add 20mm to both height & width

Glazing

Glazing strength to minimum N3 rating. Maximum double glazed panel thickness is 24.76mm
Maximum sash size is 40kg (typically 4mm glass / 12mm argon / 4mm glass)

Certification

Performance data is available for this product on request

Specify

Frame colour, configuration, height, width & overall depth, reveal type (including for plaster reveals)
Optional: equaliser (no reveals), operator & latch colour, restricted opening, fly screen, mesh type, sill flap, glass type

The above product sizes comply with structural requirements (AS2047-2014, *Windows and external glazed doors in buildings*) for an 'N3' wind rating (AS4055-2012, *Wind loads for housing*).

This is typical of sites *outside* of suburban areas. The Terrain Category could be as low as 1, have a Topographic Class of 2 & have very little shielding by way of other buildings or tall vegetation such as trees surrounding it.

Please specify if your site has different characteristics to any of those listed. Your building professional (architect, designer, surveyor, engineer, builder, etc.) can often assist with such determinations.