

MAX LITE

COMMERCIAL SERIES - 125mm FRAME



The Commercial Series Max Lite has only one important purpose - to fulfil the requirements of the largest, single-panel double glazed window




The Max Lite is capable of accepting an IGU (Insulated Glass Unit, or double glazed panel) up to 36mm thick, with a maximum area of 7.5 sq m

Multiple frames can be coupled to create large walls of double glazing.

Alternately, significant side-lites can be coupled to sliding doors, awnings, casements, or projecting sash window products to assist with access & ventilation

A fixing pocket to the inside accepts a cover strip post-installation. Like all Commercial Series products, reveals are available in primed or raw hardwood, set up for 'plaster reveals' - or for a truly 'commercial' aesthetic with no reveals at all

COMMERCIAL SERIES - 125mm FRAME

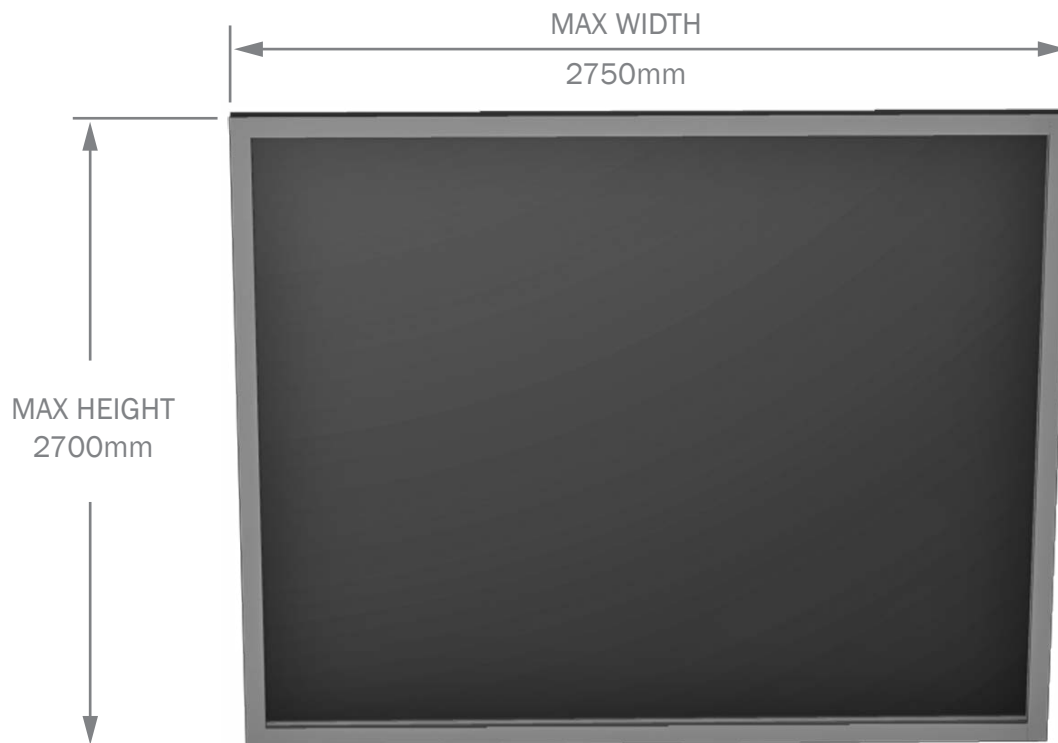

DOUBLE GLAZED SIZES

NOTE THAT HEIGHT & WIDTH MAY BE VARIED AS LONG AS TOTAL AREA REMAINS THE SAME (MAXIMUM OF 7.5 SQUARE METRES), SUBJECT TO RESTRICTIONS ON HEIGHT vs. WIDTH RATIO

NOTE: ALL SIZES ARE TYPICAL RATHER THAN DEFINITIVE. FOR SIZES OUTSIDE THESE - INCLUDING MULTIPLE, COUPLED UNITS - PLEASE DISCUSS WITH YOUR RYLOCK SALES CONSULTANT

Sizing

Window style & opening detail should be considered as viewed externally. Sizes indicated are the overall window size. Reveal is in line with outer frame dimension. For Stud openings add 20mm to both height & width.

Glazing

Glazing strength to minimum N3 rating, maximum double glazed panel thickness is 36mm. Double glazed panels typically contain 8mm toughened glass, 16mm spacer, 8mm toughened glass.

Certification

Performance data is available for this product on request.

Specify

Frame colour, height, width & overall depth, reveal type (including for plaster reveals).
Optional: equaliser (no reveals), sill flap, glass type.

The above product sizes comply with structural requirements (AS2047-2014, *Windows and external glazed doors in buildings*) for an 'N3' wind rating (AS4055-2012, *Wind loads for housing*).

This is typical of sites *outside* of suburban areas. The Terrain Category could be as low as 1, have a Topographic Class of 2 & have very little shielding by way of other buildings or tall vegetation such as trees surrounding it.

Please specify if your site has different characteristics to any of those listed. Your building professional (architect, designer, surveyor, engineer, builder, etc.) can often assist with such determinations.