

AWNING WINDOW

NSW SG SERIES




When fully open, stainless steel, double-action stays help the sash open slightly at the top, encouraging more efficient ventilation.



With the open part of the window at the bottom, ventilation can even occur when it is raining.

Reveals are pre-primed for a smooth, final paint finish.

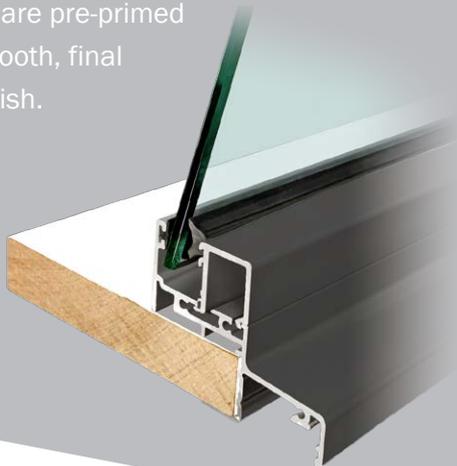

Lockable chainwinders are standard fitment, whilst fly screens - or security screens - are also available options.

A wide selection of high performance glass types can be specified within the NSW SG Series. These include body tints, low e coated glass & a range of laminated glazings up to 6.5mm in thickness.


NSW SG Series aluminium frames are available in a selection of colours, carefully chosen from the most popular architectural tones.



AWNING WINDOW



NSW SG SERIES

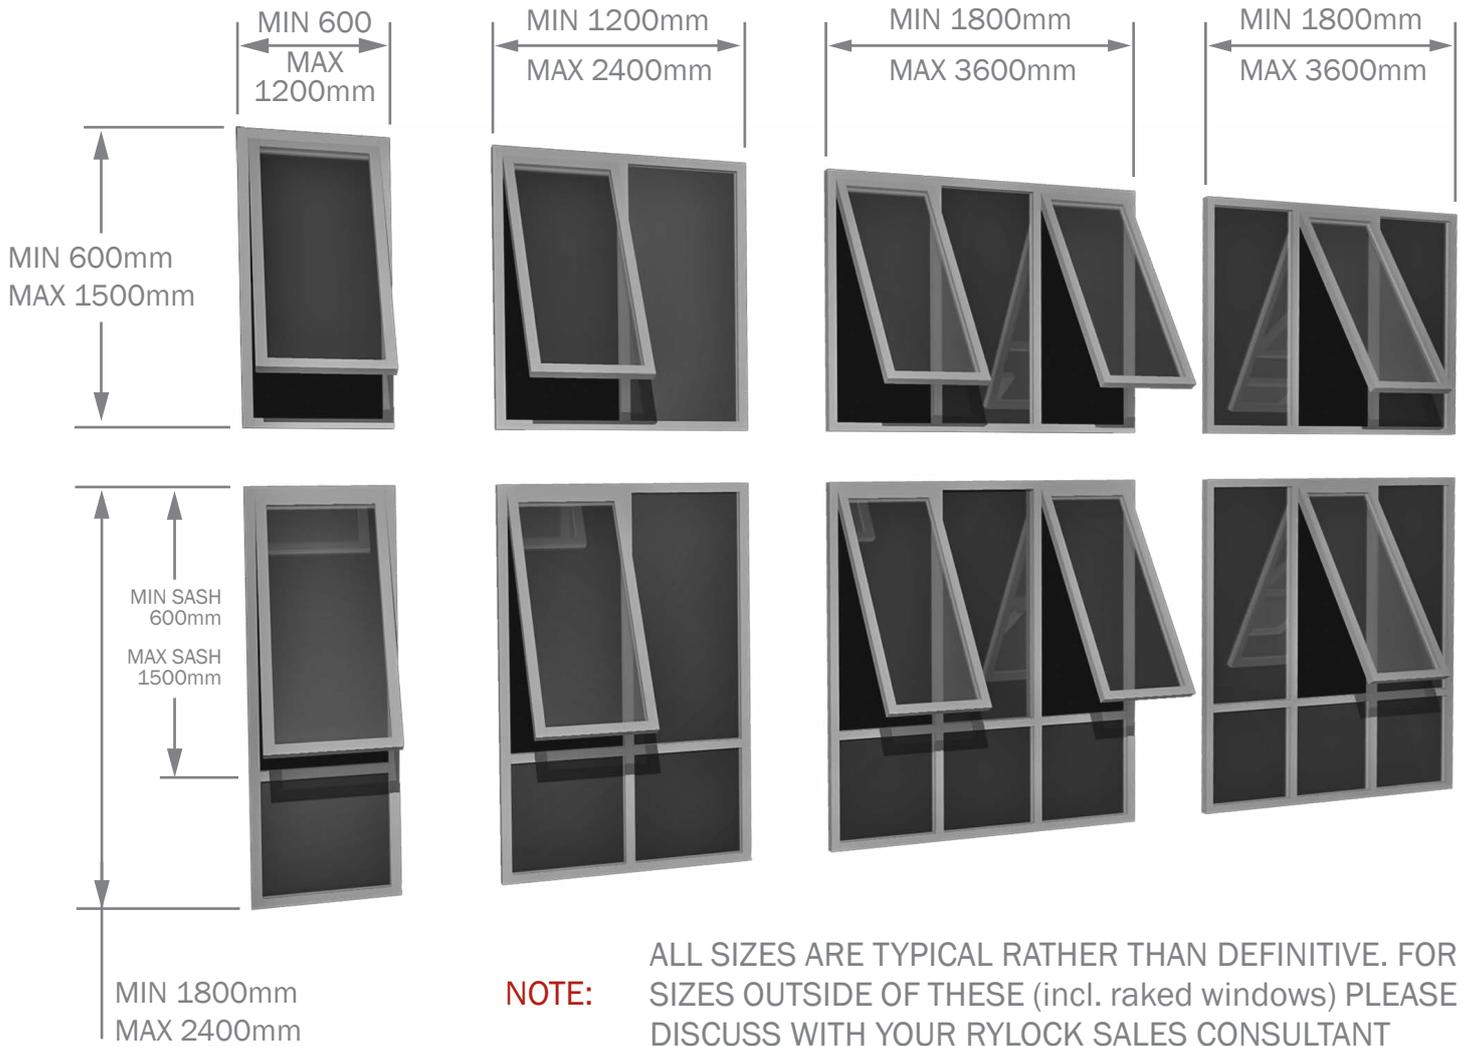

Sizing

Window style & opening detail should be considered as viewed externally.

Sizes indicated are the overall window size. Reveal is inline with outer frame dimension.

For Stud openings add 20mm to both height & width.

Glazing

Glazing strength to minimum N2 rating, to a maximum glass thickness of 6.5mm (laminated).

Certification

Certified performance data is available for this product on request.

Specify

Frame colour, configuration, height, width & overall depth.

Optional: chainwinder colour, fly screen, security screen, sill flap, glass type.

The above product sizes comply with structural requirements (AS2047-2014, *Windows and external glazed doors in buildings*) for an 'N1' wind rating (AS4055-2012, *Wind loads for housing*).

This is typical of sites in suburban areas. In addition, the location has a Terrain Category of 3, is Topographic Class 1 or 2 and assumes the building will be surrounded by others of similar size.

Please specify if your site has different characteristics to any of those listed. Your building professional (architect, designer, surveyor, engineer, builder, etc.) can often assist with such determinations.