


# CASEMENT WINDOW

NSW SG SERIES




Casement windows allow for efficient ventilation, through maximising the benefits of cross-breezes

A wide selection of high performance glass types can be specified within the NSW SG Series. These include body tints, low e coatings & a range of laminated glass up to a maximum of 6.5mm in total thickness.

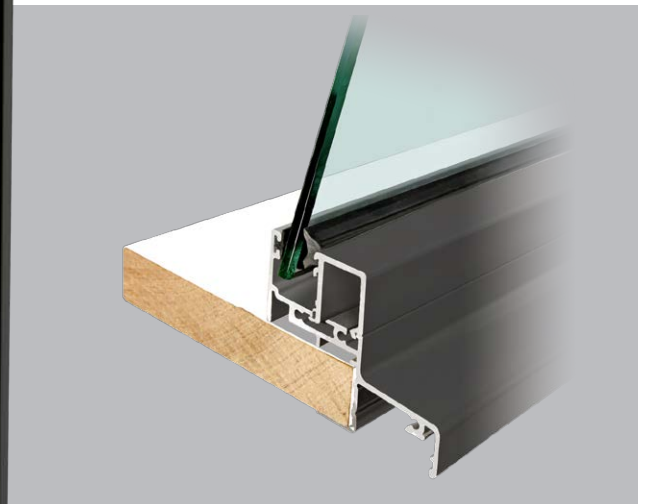

An inline reveal simplifies installation into a wide variety of wall types. NSW SG Series aluminium frames are available in a selection of colours, carefully chosen from the most popular architectural tones.



Double action hinges allow the sash to open fully, maximising airflow.

All glass is installed into dual vinyl sided rebates, ensuring vibration free glazing. A co-extruded santroprene inner seal resists shrinkage & also assists with weatherproofing.




Wedgeless latches make for simple operation.

# CASEMENT WINDOW



## NSW SG SERIES

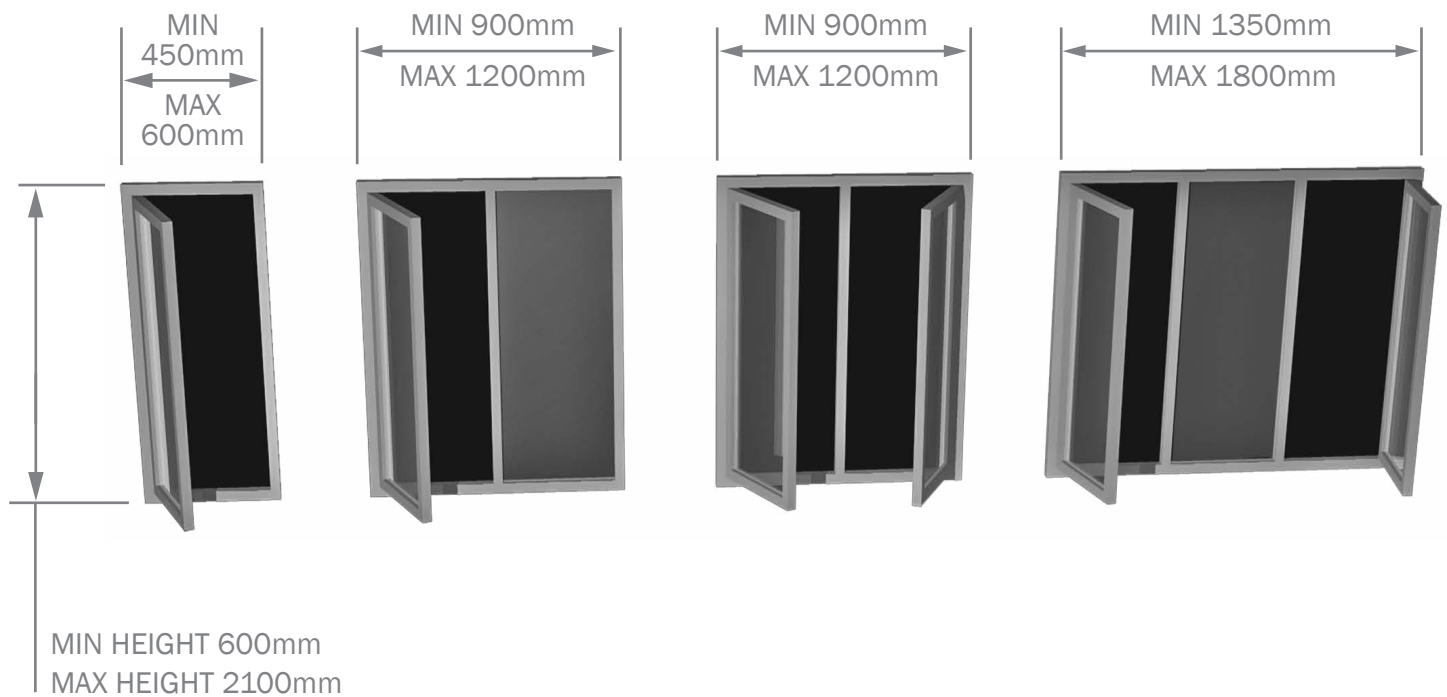

### NOTE:

ALL SIZES ARE TYPICAL RATHER THAN DEFINITIVE. FOR SIZES OUTSIDE OF THESE (incl. raked windows) PLEASE DISCUSS WITH YOUR RYLOCK SALES CONSULTANT

### Sizing

Window style & opening detail should be considered as viewed externally.

Sizes indicated are the overall window size. Reveal is inline with outer frame dimension.

For Stud openings add 20mm to both height & width.

### Glazing

Glazing strength to minimum N2 rating.

Maximum glass thickness is 6.5mm (laminated).

Maximum sash weight of 25kg.

### Certification

Certified performance data is available for this product on request.

### Specify

Frame colour, configuration, height, width & overall depth.

Optional: latch colour, sill flap, glass type.

The above product sizes comply with structural requirements (AS2047-2014, *Windows and external glazed doors in buildings*) for an 'N1' wind rating (AS4055-2012, *Wind loads for housing*).

This is typical of sites in suburban areas. In addition, the location has a Terrain Category of 3, is Topographic Class 1 or 2 and assumes the building will be surrounded by others of similar size.

Please specify if your site has different characteristics to any of those listed. Your building professional (architect, designer, surveyor, engineer, builder, etc.) can often assist with such determinations.